



NF-F12 industrialPPC-24V-2000 IP67 PWM

Product specifications

Date

04.11.2014

Rascom Computer Ges.m.b.H.
Linzer Strasse 237
A-1140 Vienna, Austria

Tel. +43 (1) 494 13 95 -0
Fax. +43 (1) 494 13 95 -10
sales@noctua.at


1. General specifications

1.1. Mechanical specifications

Dimensions (without AVP*)	120x120x25 mm
Dimensions (with AVP*)	120x120x27 mm
Wire length	400 mm
Weight	180g
Rotational direction	Counter-Clockwise

* AVP: Anti-vibration pads

1.2. Dimensions

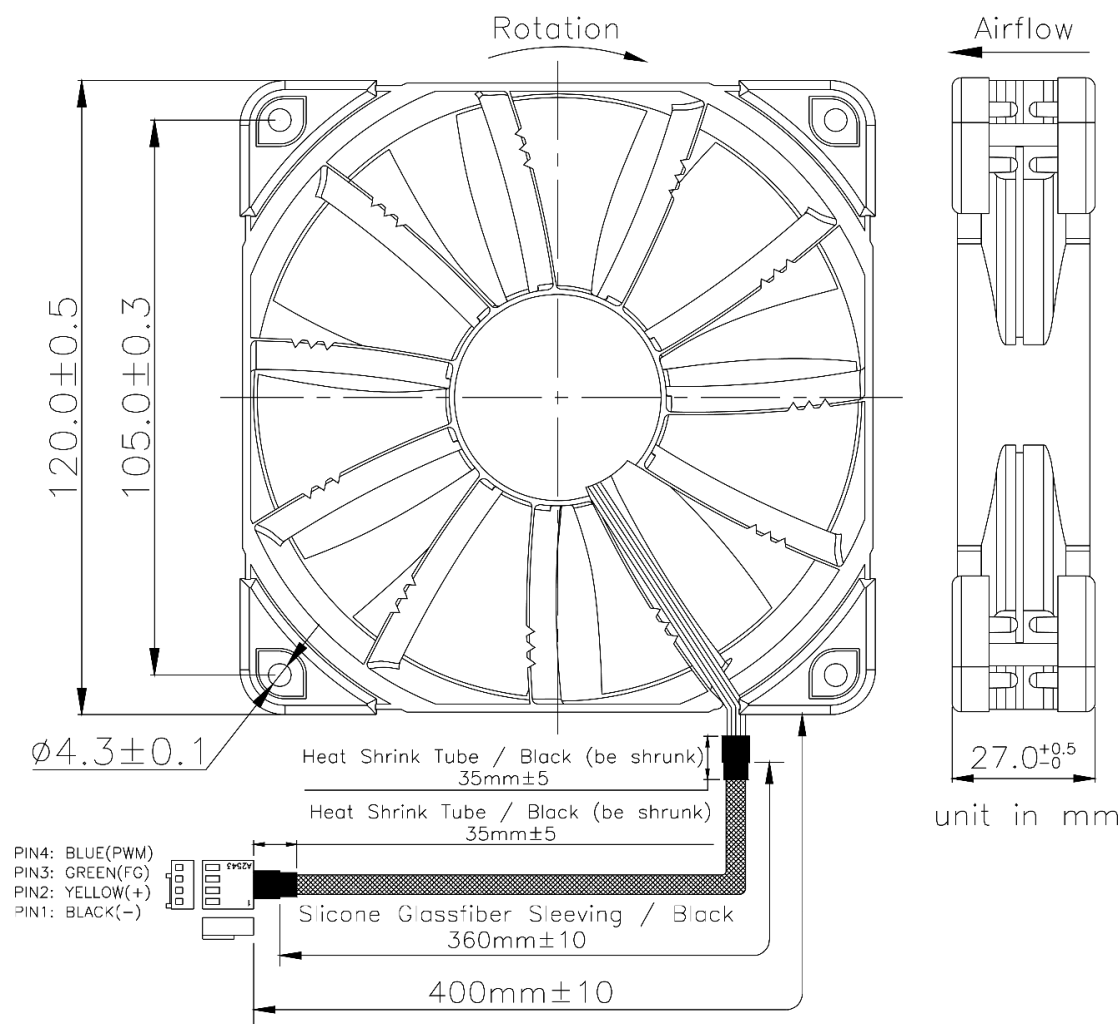

1.3. Parts & materials

Plastic type - frame	PA66 GF30
Plastic type - impeller	PA66 GF30
Bearing	SS02
Wire	28 AWG w/ Mesh-Sleeving
Connector type	A2543-4PIN (or equal)

1.4. Standards

Production standards	Produced according to ISO9001 & ISO14001
Safety standards	EN55032, EN55035, EN62368-1
Environmental standards	RoHS according to EU directive 2011/65/EU-RoHS and amendment 2015/863
UL listed (E356416)	Yes

1.5. Flammability

Plastic housing and frame	UL 94 V-0
Printed Circuit Board (PCB)	UL 796, UL 94 V-0
Cable	UL 1061
Mesh sleeving	UL 1441 VW-1, E203950
Heat shrink tubing	UL 224 VW-1, E203950
Connector	UL 94 V-0

1.6. Labels

Main label

- Model number
- Rated voltage
- Rated power consumption
- Rated current
- Environmental & safety standards

071024DA
1A2HKQ2

Side label (printed in white)

- Production date
- Internal reference numbers



1.7. Environmental specifications

Operating temperature	-40 °C to +70 °C
Operating humidity	15% to 90%
Storage temperature	-40 °C to +75 °C
Storage humidity	15% to 90%
Protection level	IP67

2. Electrical specifications

2.1. Wire specifications

Pin 1	Black: Ground (GND)
Pin 2	Yellow: Voltage (Vcc)
Pin 3	Green: RPM Signal
Pin 4	Blue: PWM Signal

2.2. Motor specifications


Number of poles / slots / phases	4/6/3
Rated voltage	24V DC
Operating voltage	12.0V - 30.0V DC
Starting voltage	12.0V DC
Rated current	0.07A (+/-10%)
Rated power consumption	1.68W (+/-10%)
Locked rotor protection	Auto power off after locked at rated voltage for 1 sec. After auto power off, the circuit attempts to restart in 2 to 6 sec.
Polarity protection	Open circuit when Vcc & GND are exchanged. Circuit won't be burned within 5 sec when Vcc & GND are exchanged.

2.3. Insulation

Insulation resistance	10 MΩ / between unshielded wire and frame at 500 VDC/min
Dielectric strength	5 mA max. / measured between lead wire (+) and frame at 500 VAC/min



2.4. RPM signal specification

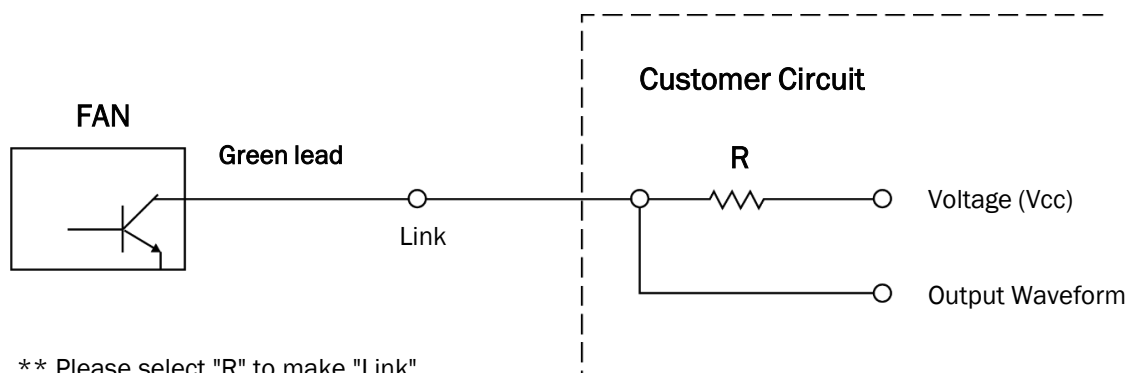

** Please select "R" to make "Link"


Within 1~5 mA

If you need higher pull-up voltage, please contact Noctua.

** 26.4V Max

5mA Max

Output Waveform

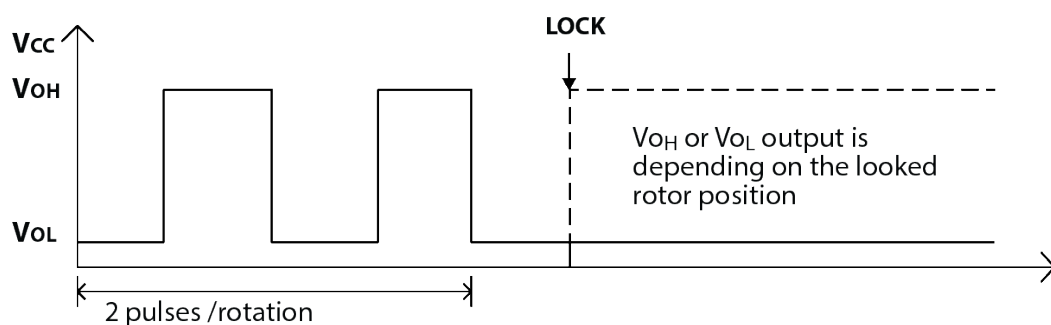

2.5. PWM duty cycle operating points

PWM Control Input (W)



PWM frequency = 18 KHz to 30 KHz

High Level = 3.3V to 6V

Low Level = 0V to 0.4V


PWM Range = 20 % to 100 %



Fan stops at 0% PWM duty cycle.

The starting voltage must be the same as the rated voltage.

Duty cycle (%)	RPM	Tolerance
0	stop	0
20	550	+/- 20%
40	875	+/- 10%
60	1300	+/- 10%
80	1675	+/- 10%
100	2000	+/- 10%

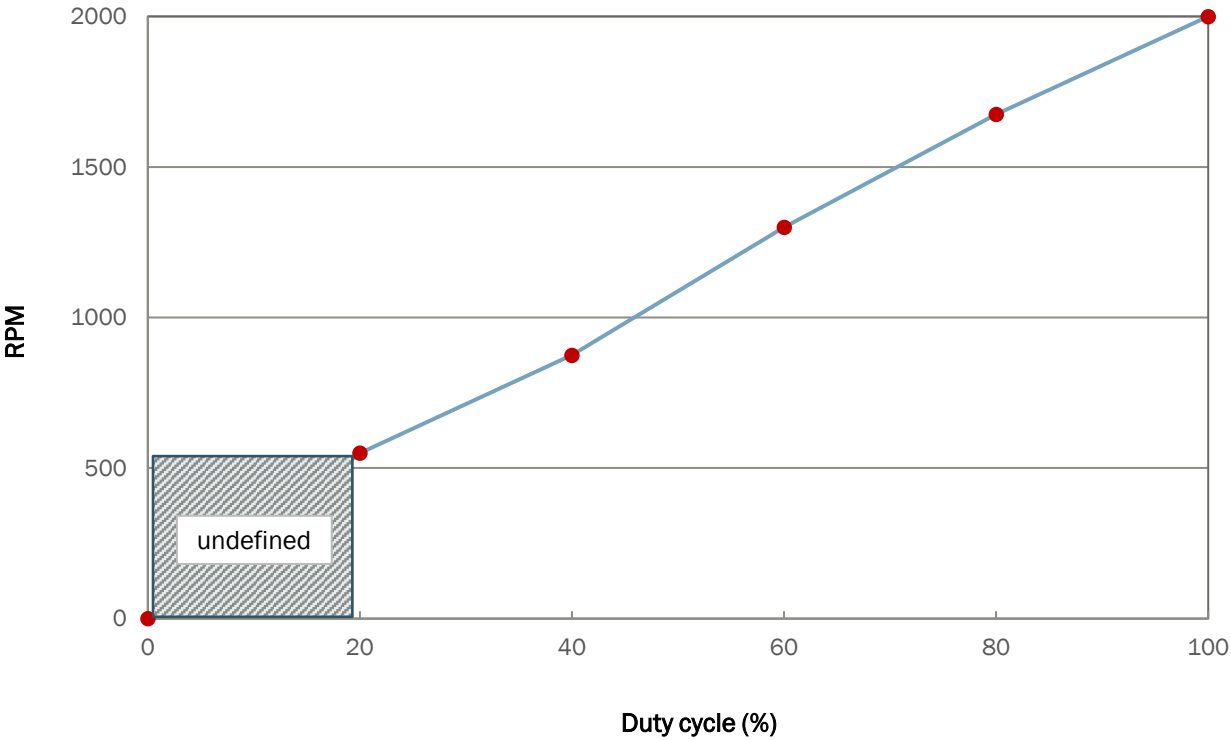


3. Performance specifications

3.1. General performance specifications (+/- 10%)

Rotational speed	2000 rpm
Airflow	121.8 m³/h
Acoustical noise	29.7 dB(A)
Static pressure	3.94 mm H2O
MTTF (at 40°C)	> 150,000 h

3.2 Performance curve

	Airflow [m³/h]	Pressure [mm H2O]
1	121.80	0.00
2	91.20	1.08
3	59.80	1.73
4	33.10	2.53
5	0.00	3.94

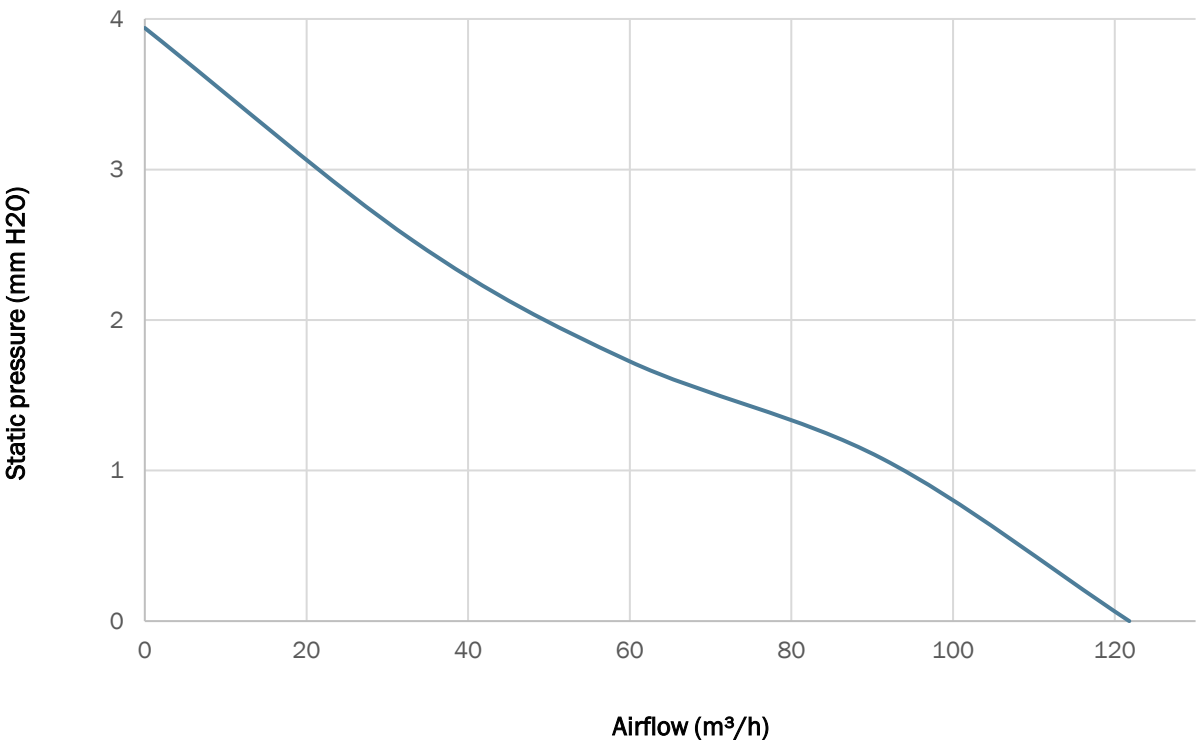

4. Remarks

Noctua makes no warranties and disclaims all warranties, expressed or implied, or statutory related to these specifications. Noctua is not liable for any incompleteness or inaccuracies as well as consequential, incidental or indirect damages relating to the specifications or their use. The user assumes the full risk of using this specification. Under no circumstances shall Noctua be liable for any actual, direct, indirect, punitive, or consequential damages arising from such use, even if advised of the possibility of such damages.

Noctua doesn't take any responsibility if the product is used outside the specified parameters.

Specifications are obtained after 5 minutes of operation at 25 °C and 65% humidity. The fan was mounted vertically in free air conditions.

Please note that excessive humidity can be harmful to the product and it should therefore be stored in cool, dry environments only. If the product was stored at less than 5 °C for more than several hours, it should be stored at more than 20 °C for at least 24 hours before use.

Handle the fan with care. Applying pressure or force upon the impeller or dropping the fan can result in damage. Take the necessary precautions (fan grills, etc.) to prevent injuries. Do not touch the fan blades during operation.

Please ensure the correct polarity. As the fan doesn't have a protection against reverse polarity, reverse connection can lead to damage.

Please make sure that the fan is properly mounted. Noctua cannot be held responsible for vibrations or other noises caused by improper installation.

